



There is a solution for farmers who are looking for a high-quality spreader with compact dimensions: the latest model of the JOSKIN TORNADO3 range, the T5011/11V.

This spreader is shorter: the body length before the door is now 5 m, which significantly improves the manoeuvres and makes it well suited for narrow paths in rural areas.

Its body height remains 1.13 m, which ensures a very low center of gravity. With a volume before the door of almost 11 m³, the spreader has perfect dimensions.


It also benefits from the same advantages and care taken during its design and manufacturing as the other TORNADO3 spreaders:

- high resistance to wear (body in HLE 550 steel);
- professional standardized manufacturing quality;
- short and compact vehicle for a low center of gravity;
- very good manoeuvrability;
- limited empty weight;
- good visibility on the body from the cabin;
- very high spreading and crumbling quality;
- heavy-duty vertical beaters on wide tubes (219 mm) with elastic couplings;
- beater rotation speed of 445 rpm.

This makes an off-road compact spreader that will spread precisely and homogeneously, for the most demanding users.



Non-contractual document. Data can change without notice. The pictures do not necessary correspond to standard equipment.

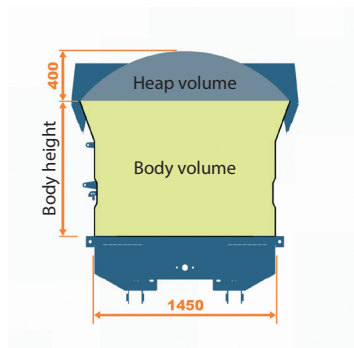

Ref.	Model	Off-road payload (t)	Inner body dimensions (m)				Body volume before door (m ³)	Manure volume before door (m ³)	Manure volume up to beaters (m ³)	Axle: □ (mm) - track (mm) - studs	Brakes
			Length before door	Length up to beaters	Width	Height					
4972	T5011/11V	12	5.00	5.50	1.45	1.13	8.60	10.80	12.00	ADR 130x2100-10S	406 x 120